

IZIP[®] eBikes GEOMETRY 2014

	SIZE	A (in)	A (mm)	B (mm)	C (mm)	D	E	F (mm)	G (mm)	H (mm)	WHEEL SIZE
E3 Dash	S/M	17"	430	606	170	70°	72°	461	1100	820	700c
	M/L	19"	480	616	170	70°	72°	461	1122	860	700c
E3 Metro	(One size)	18"	460	590	210	70°	70°	522	1138	525	26"
E3 Path+	M	17"	430	570	170	70°	72°	461	1122	745	700c
	L	19"	480	609	170	70°	72°	461	1122	845	700c
	Low step	19"	480	609	170	70°	72°	461	1122	660	700c
E3 Peak	S/M	17"	430	595	140	70°	72°	480	1140	800	27.5"
	M/L	19"	480	620	140	70°	72°	480	1150	835	27.5"
Town:exp	(One size)	17"	440	580	220	69°	72°	465	1145	590	20"
E3 Vibe	M	18.5"	470	613	155	70°	69°	460	1140	730	26"
	Low step	17"	430	602	155	70°	69°	465	1140	475	26"
E3 Zuma	S/M	18"	460	605	148	70°	70°	522	1153	740	26"
	L/XL	20"	500	620	148	70°	70°	522	1157		26"
	Low step	18"	460	605	148	70°	70°	522	1153	475	26"

eflow[®] GEOMETRY 2014


	SIZE	A* (in)	A* (mm)	B** (mm)	C (mm)	D	E	F (mm)	G (mm)	H (mm)	WHEEL SIZE
E3 Nitro	S	18"	457	545	180	70°	73°	440	1048	760	26"
	M	20"	508	585	205	71°	72°	440	1077	805	26"
	L	21.5"	546	605	215	71°	72°	440	1098	840	26"
	S low step	18"	457	545	180	71°	73°	440	1048	600	26"
	M low step	20"	508	585	205	71°	72°	440	1077	600	26"
E3 Flight	S	18"	457	545	180	70°	73°	440	1048	760	26"
	M	20"	508	585	205	71°	72°	440	1077	805	26"
	L	21.5"	546	605	215	71°	72°	440	1098	840	26"
	S low step	18"	457	545	180	71°	73°	440	1048	600	26"
	M low step	20"	508	585	205	71°	72°	440	1077	600	26"
E3 Fit	(One size)	16"	410	666	120	72°	73°	420	1142	530	20"

eZip[®] GEOMETRY 2014

	SIZE	A (in)	A (mm)	B (mm)	C (mm)	D	E	F (mm)	G (mm)	H (mm)	WHEEL SIZE
Trailz	M	19"	480	612	145	72°	73°	450	1186	700	26"
	Low step	17.5"	440	565	145	71.5°	73°	450	1145	460	26"
Trailz Commuter	M	19"	480	612	145	72°	73°	450	1186	700	26"
	Low Step	17.5"	440	565	145	71.5°	73°	450	1145	460	26"
Eco-ride 2	M	18.5"	470	605	155	70°	69°	465	1140	730	26"
	Low step	17"	430	598	155	70°	69°	465	1140	440	26"

MEASUREMENTS

A	Seat tube length (measured center to top)
B	Top tube length (measured horizontally)
C	Head tube length
D	Head angle
E	Seat angle
F	Chain stay length
G	Wheelbase
H	Stand-over height (measured at bottom bracket)

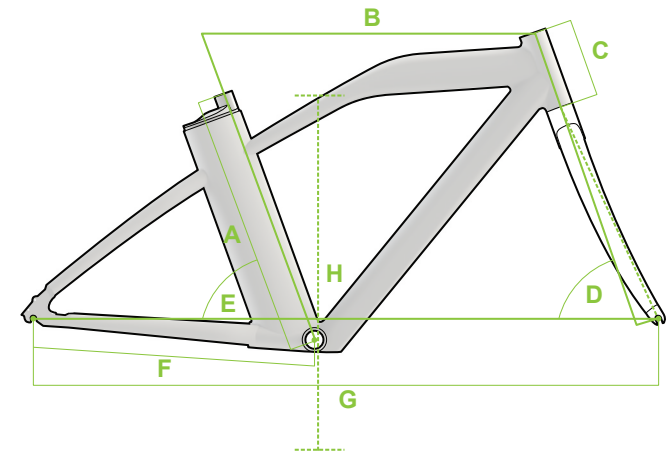

Some geometry figures for bikes currently in development may change without notice.

CURRIE TECHNOLOGIES[®] | 3850A Royal Avenue, Simi Valley, CA 93063 | 1-800-377-4532 | currietechnologies.com

HAIBIKE GEOMETRY 2014

	SIZE	A (in)	A (mm)	B (mm)	C (mm)	D	E	F (mm)	G (mm)	H (mm)	I (mm)	J (mm)	WHEEL SIZE
Xduro RX	S	15.8	40	570	140	70	73	485	1114	-60	646	372	29"
	M	17.7	45	585	140	70	73	485	1129	-60	646	387	29"
	L	19.7	50	600	140	70	73	485	1144	-60	646	402	29"
	XL	21.7	55	615	140	70	73	485	1159	-60	646	417	29"
Xduro RX FS	S	15.8	40	565	140	69	73	465	1115	-20	612	378	27.5"
	M	17.7	45	580	140	69	73	465	1130	-20	612	393	27.5"
	L	19.7	50	595	140	69	73	465	1145	-20	612	408	27.5"
	XL	21.7	55	610	140	69	73	465	1160	-20	612	423	27.5"
AMT RX	S	15.8	40	560	140	68	73	465	1131	0	618	371	27.5"
	M	17.3	44	575	140	68	73	465	1146	0	618	386	27.5"
	L	18.9	48	590	140	68	73	465	1161	0	618	401	27.5"
	XL	20.5	52	605	140	68	73	465	1176	0	618	416	27.5"
AMT PRO FS	S	15.8	40	560	140	68	73	465	1131	0	618	371	27.5"
	M	17.3	44	575	140	68	73	465	1146	0	618	386	27.5"
	L	18.9	48	590	140	68	73	465	1161	0	618	401	27.5"
	XL	20.5	52	605	140	68	73	465	1176	0	618	416	27.5"
Superrace	XS	19.7	50	530	115	71	74	462	1043	-68	547	373	700c
	S	20.7	53	545	135	72	74	462	1049	-68	570	382	700c
	M	22	56	560	155	73	74	462	1054	-68	592	390	700c
	L	23.2	59	575	180	74	74	462	1059	-68	620	397	700c
	XL	24.4	62	590	180	74	74	462	1074	-68	620	412	700c

MEASUREMENTS

A	Seat tube length (measured center to top)
B	Top tube length (measured horizontally)
C	Head tube length
D	Head angle
E	Seat angle
F	Chain stay length
G	Wheelbase
H	Bottom bracket drop
I	Stack
J	Reach

