

REENTION



2021-2022

Inner battery case

灰熊 GRIZZLY BEAR	P 2
河马 HIPPO	P 3
蛟龙 GERLON	P 4 ~ P 5
蜜蜂 BEE	P 6 ~ P 7
黄蜂 WASP	P 8
棱镜 PRISM	P 9
黑鹰 BLACK EAGLE	P 10
犀牛 RHINO	P 11 ~ P 12
蜻蜓 DRAGONFLY	P 13
鳗鱼 EEL	P 15
剑鱼 DORADO	P 16 ~ P 18

Folding bike battery case

珊瑚 CORAL	P 19 ~ P 20
半月 SCIMITAR	P 20
利刃 EDG	P 2 1
利剑 RAPIER	P 2 1

Down tube battery case

麒麟 KIRIN	P 2 2
鹦鹉 POLLY	P 2 3 ~ P 2 4
虎鲨 TIGERSHARK	P 2 5
海兔 CUTTLE	P 2 6
擎天 ATLAS	P 2 7
雷霆 THUNDER	P 2 7

Seat tube battery case

蜗牛 SNAIL	P 1 4
银鱼 SILVER FISH	P 2 8

Rack battery case

光芒 BRILLIANCE	P 2 9
袋鼠 KANGAROO	P 3 0
银鲨 SILVERTIP SHARK	P 3 1
飞鱼 VULPECULA	P 3 1

Model:IGB-T




T代表上取式：电池盒铝壳上方平整
T:up-take style

Model:IGB-U



U代表下取式：电池盒铝壳上有限位扳手 前盖带锁舌
U:down-take style,case with safety lock lever

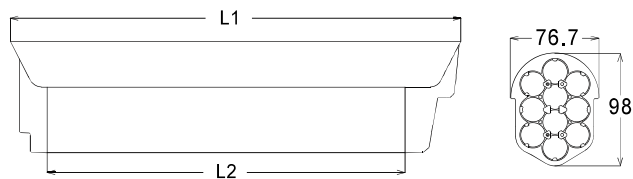


Model	IGB	
Maximum cells	40 (21700)	30 (21700)
Max capacity	36V20Ah 48V15Ah	36V15Ah
Charging port	DC2.1 Opt. 3Pin high current	
Discharge port	6Pin	
LED indicator	single LED with three colours	
USB port	without	
Power switch	without	
L1·L2 (mm)	393x311	323x241


Down tube



40颗上取管型

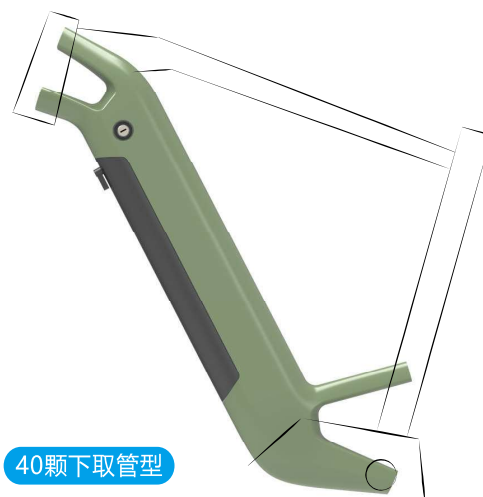

40颗下取管型




30颗小轮径管型




30颗折叠车管

Model:IH-6

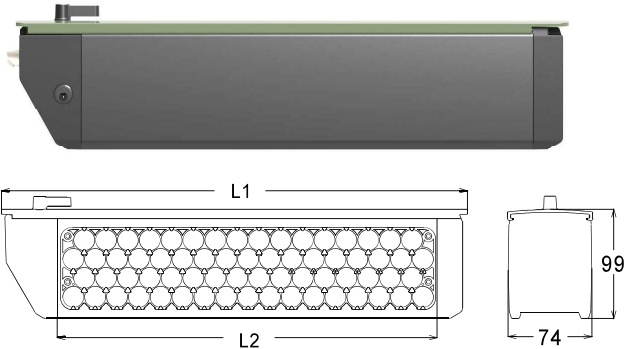


Model	IH-6	
Maximum cells	65 (18650)	42 (21700)
Max capacity	36V21Ah 48V17.5Ah	36V20Ah 48V17.5Ah
Charging port	DC2.1 Opt. 3Pin high current	
Discharge port	6Pin	
LED indicator	4 LED lights	
USB port	without	
Power switch	without	
L1·L2(mm)	410x337	

Down tube

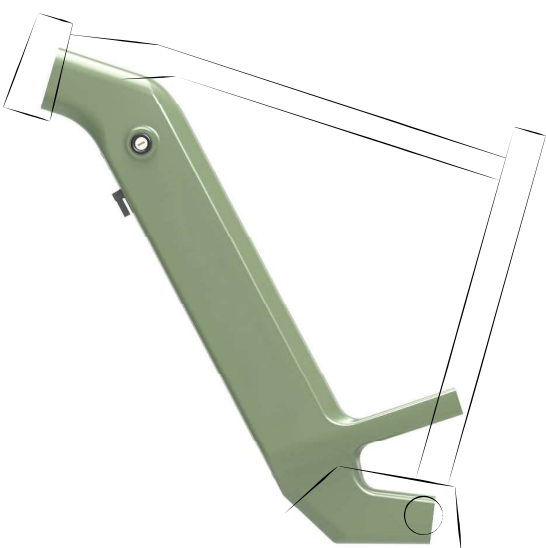


下管两侧可定制LOGO

Model:IG-T



T代表上取式：电池盒铝壳上方平整
T:up-take style

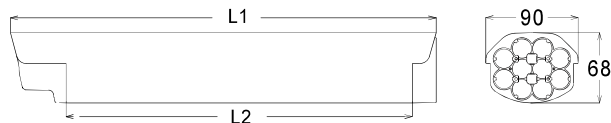


Model	IG	
Maximum cells	50 (18650)	40 (18650)
Max capacity	36V17.5Ah	36V14Ah
Charging port	DC2.1 Opt. 3Pin high current	
Discharge port	6Pin	
LED indicator	single LED with three colours	
USB port	without	
Power switch	without	
L1·L2(mm)	426x350	361x285

Model:IG-U / IG-S




U代表下取式：电池盒铝壳上有限位扳手 前盖带锁舌
S代表侧取式：电池盒铝壳上有限位扳手 前盖带锁舌
U:down-take style,case with safety lock lever
S:side-take style,case with safety lock lever

Model:IG-PLUS-T

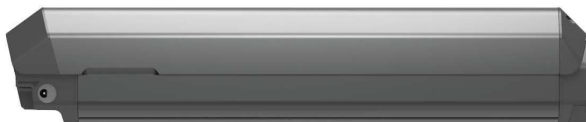

T代表上取式：电池盒铝壳上方平整
T:up-take style

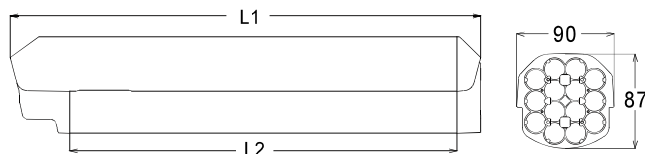

Model	IG-PLUS	
Maximum cells	70 (18650)	52 (18650)
Max capacity	36V24.5Ah 48V17.5Ah	36V17.5Ah 48V14Ah
Charging port	DC2.1 Opt. 3Pin high current	
Discharge port	6Pin	
LED indicator	single LED with three colours	
USB port	without	
Power switch	without	
L1·L2 (mm)	426x350	361x285

Model:IG-PLUS-U / IG-PLUS-S



U代表下取式：电池盒铝壳上有限位扳手 前盖带锁舌
S代表侧取式：电池盒铝壳上有限位扳手 前盖带锁舌
U:down-take style,case with safety lock lever
S:side-take style,case with safety lock lever

Down tube

IG-T

50颗上取车型

IG-U

50颗下取车型

IG-S

50颗侧取车型

IG-PLUS-T

70颗上取车型

IG-PLUS-U

70颗下取车型

IG-PLUS-S

70颗侧取车型

Down tube **NEW**

IG-T

40颗上取车型

IG-PLUS-T

52颗上取车型

IG-U

40颗下取车型

IG-PLUS-U


52颗下取车型

双电池车型

Model:IB-T



T代表上取式：电池盒铝壳上方平整
T:up-take style

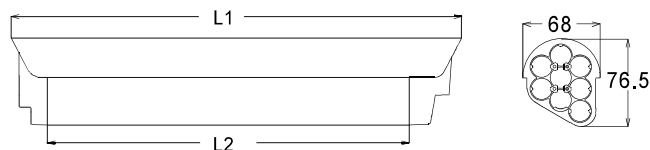

Model	IB	
Maximum cells	40 (18650)	30 (18650)
Max capacity	36V14Ah	36V10.5Ah
Charging port	DC2.1 Opt. 3Pin high current	
Discharge port	6Pin	
LED indicator	single LED with three colours	
USB port	without	
Power switch	without	
L1·L2 (mm)	434x356	369x291


*标配专利锁 Standard patent lock

Model:IB-U




U代表下取式：电池盒铝壳上有限位扳手 前盖带锁舌
U:down-take style,case with safety lock lever

Model:IB-PLUS-T



T代表上取式：电池盒铝壳上方平整
T:up-take style

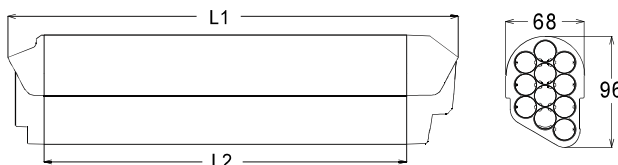

Model	IB-PLUS	
Maximum cells	52 (18650)	40 (18650)
Max capacity	36V17.5Ah 48V14Ah	36V14Ah
Charging port	DC2.1 Opt. 3Pin high current	
Discharge port	6Pin	
LED indicator	single LED with three colours	
USB port	without	
Power switch	without	
L1·L2(mm)	434x356	369x291





*标配专利锁 Standard patent lock

Model:IB-PLUS-U



U代表下取式：电池盒铝壳上有限位扳手 前盖带锁舌
U:down-take style,case with safety lock lever


Down tube

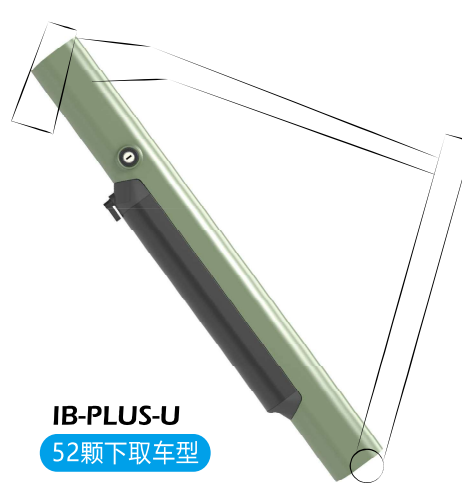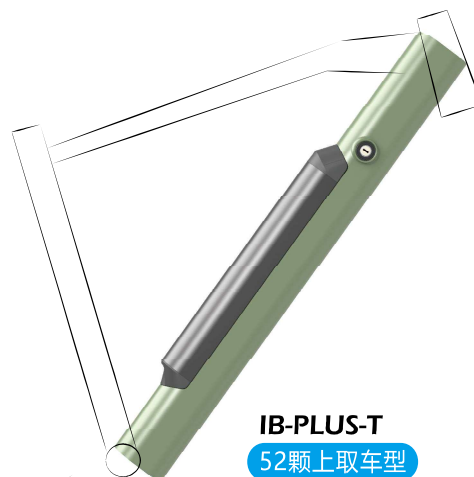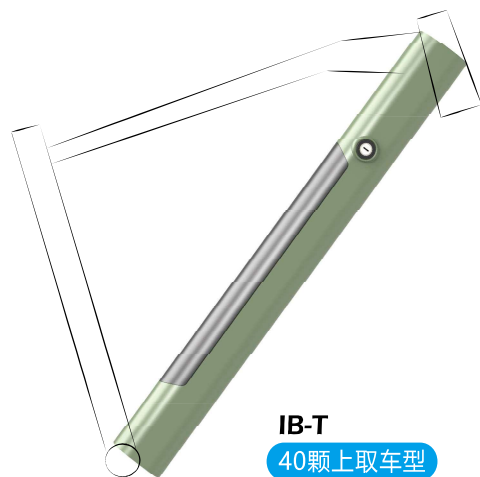

Model:IW-T



T代表上取式：电池盒铝壳上方平整
T:up-take style

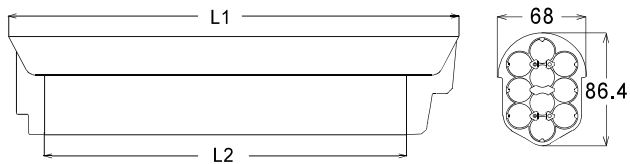

Model:IW-U




U代表下取式：电池盒铝壳上有限位扳手 前盖带锁舌
U:down-take style,case with safety lock lever



Model	IW	
Maximum cells	50 (18650)	40 (18650)
Max capacity	36V17.5Ah	36V14Ah
Charging port	DC2.1 Opt. 3Pin high current	
Discharge port	6Pin	
LED indicator	single LED with three colours	
USB port	without	
Power switch	without	
L1·L2 (mm)	434x356	369x291

*标配专利锁 Standard patent lock

Down tube

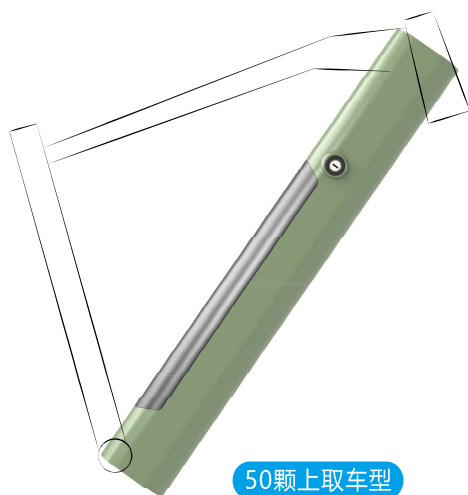

50颗上取车型

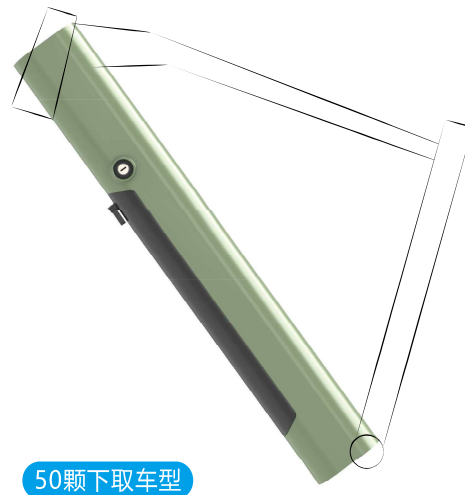


50颗下取车型

NEW

Model:IP-T



T代表上取式：电池盒铝壳上方平整
T:up-take style

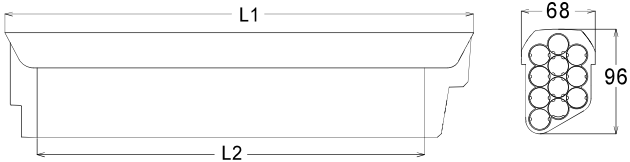

Model:IP-U






U代表下取式：电池盒铝壳上有限位扳手 前盖带锁舌
U:down-take style,case with safety lock lever

Model	IP	
Maximum cells	52 (18650)	40 (18650)
Max capacity	36V17.5Ah 48V14Ah	36V14Ah
Charging port	DC2.1 Opt. 3Pin high current	
Discharge port	6Pin	
LED indicator	single LED with three colours	
USB port	without	
Power switch	without	
L1·L2 (mm)	431x356	366x291

*标配专利锁 Standard patent lock




Down tube

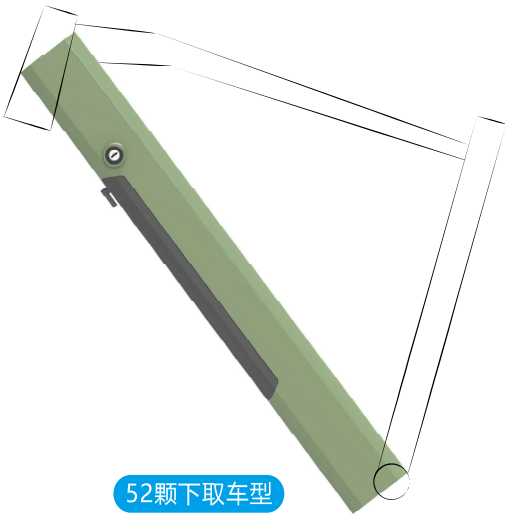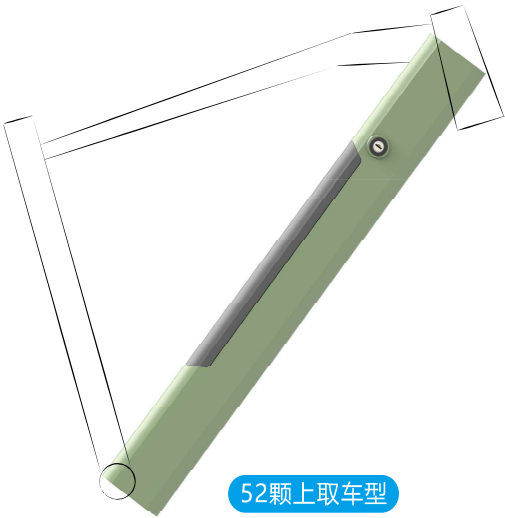


Model:IBE-T



T代表上取式：电池盒铝壳上方平整
T:up-take style

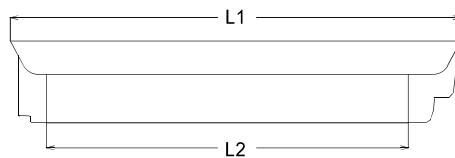


Model:IBE-U






U代表下取式：电池盒铝壳上有限位扳手 前盖带锁舌
U:down-take style,case with safety lock lever

Model	IBE	
Maximum cells	30 (18650)	20 (21700)
Max capacity	36V10.5Ah	36V10Ah
Charging port	DC2.1 Opt. 3Pin high current	
Discharge port	6Pin	
LED indicator	single LED with three colours	
USB port	without	
Power switch	without	
L1·L2 (mm)	434x356	386x308


Down tube



Seat tube (提供配套束仔)

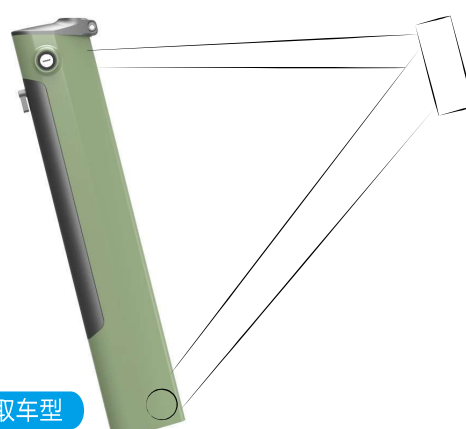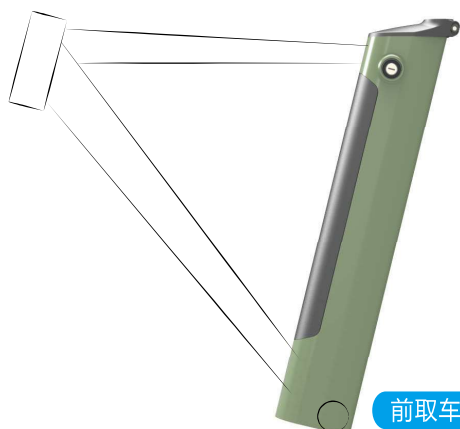

Model:IR-5

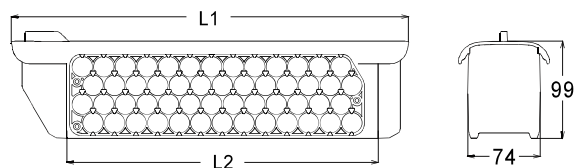


Model	IR-5
Maximum cells	52 (18650)
Max capacity	36V17.5Ah / 48V14Ah
Charging port	DC2.1 Opt. 3Pin high current
Discharge port	6Pin
LED indicator	4 LED lights
USB port	without
Power switch	without
L1·L2 (mm)	362.5x274.5

Down tube




Model:IR-7

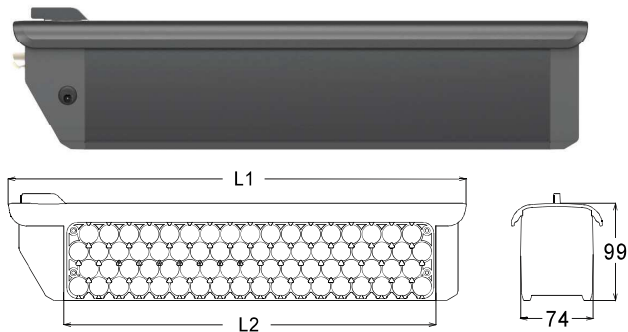


Model	IR-7	
Maximum cells	70 (18650)	42 (21700)
Max capacity	36V24.5Ah 48V17.5Ah	36V20Ah 48V15Ah
Charging port	DC2.1 Opt. 3Pin high current	
Discharge port	6Pin	
LED indicator	4 LED lights	
USB port	without	
Power switch	without	
L1·L2 (mm)	441x355	

Down tube

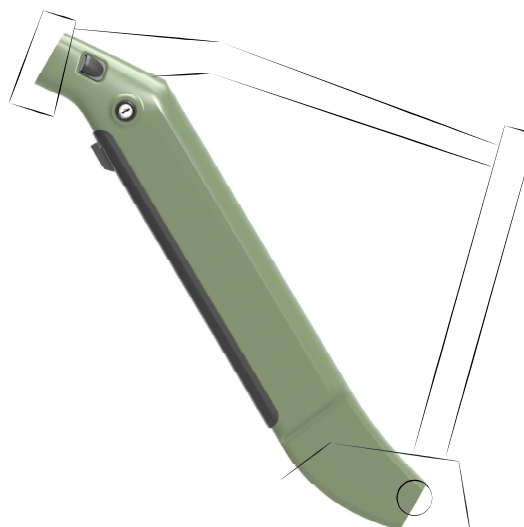


犀牛21700 RHINO

Model:IR-21700

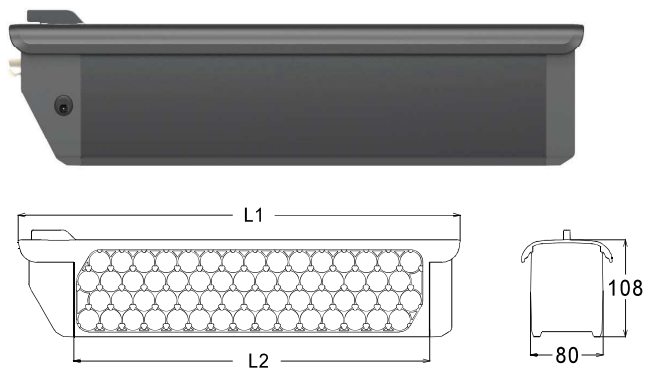

Model	IR-21700	
Maximum cells	60 (21700)	
Max capacity	36V30Ah	/ 48V20Ah
Charging port	DC2.1 Opt. 3Pin high current	
Discharge port	6Pin	
LED indicator	4 LED lights	
USB port	without	
Power switch	without	
L1·L2 (mm)	441x355	

Down tube

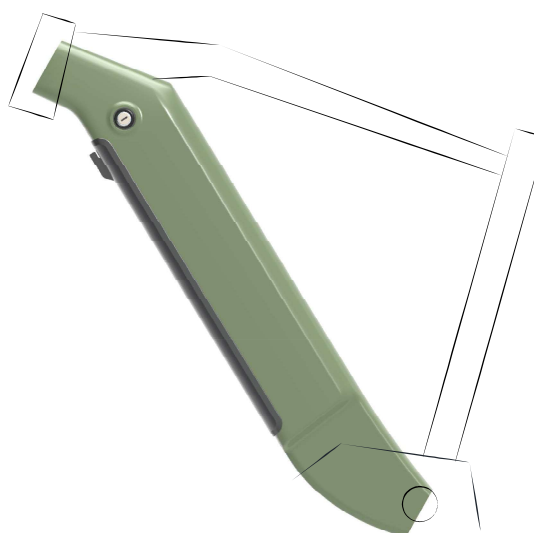
NEW



Model:IF-2C



Model:IF-3C






Model:IF-4C

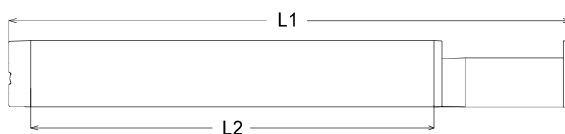


Model	IF-2C	IF-3C	IF-4C
Maximum cells	28 (18650)	30 (18650)	40 (18650)
Max capacity	24V14Ah	36V10.5Ah	36V14Ah
Charging port	DC2.1 Opt. 3Pin high current		
Discharge port	2Pin Opt. 6Pin		
LED indicator	without		
USB port	without		
Power switch	without		
Controller box*	with		
L1·L2 (mm)	680x510	610x460	545x395

Down tube

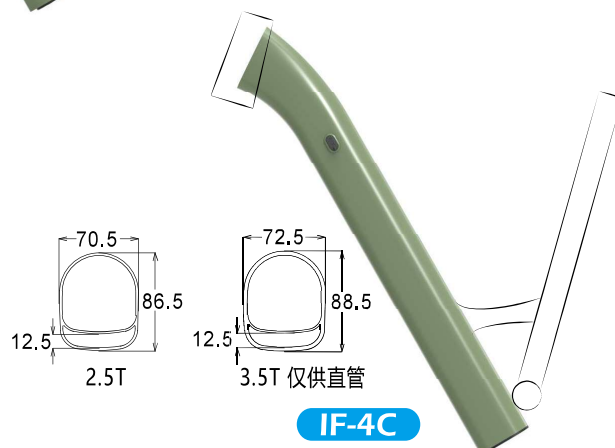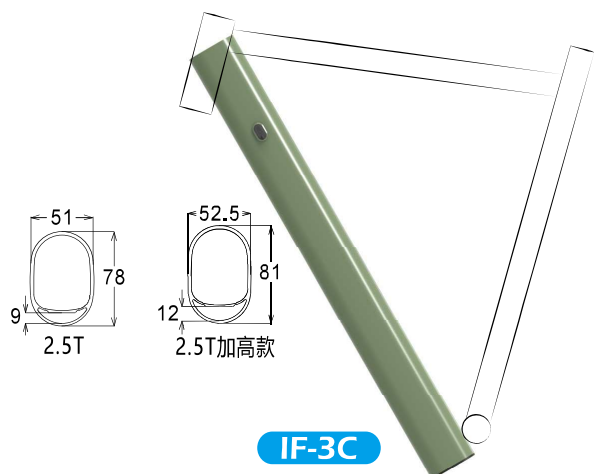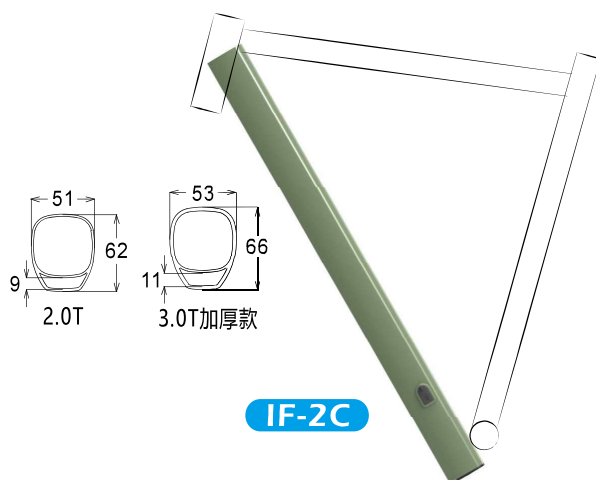


Model:SS-18650

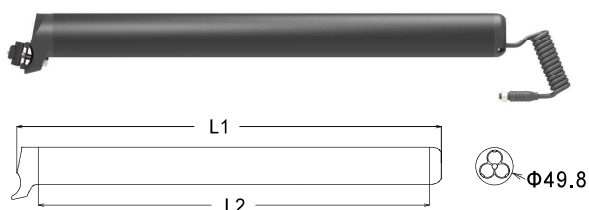


Model	SS-18650
Maximum cells	20 (18650)
Max capacity	36V7Ah
Charging port	DC2.1 Opt. 3Pin high current
Discharge port	2Pin
LED indicator	without
USB port	without
Power switch	without
L1·L2 (mm)	595x520

*Optional patent seat clamp

Seat tube

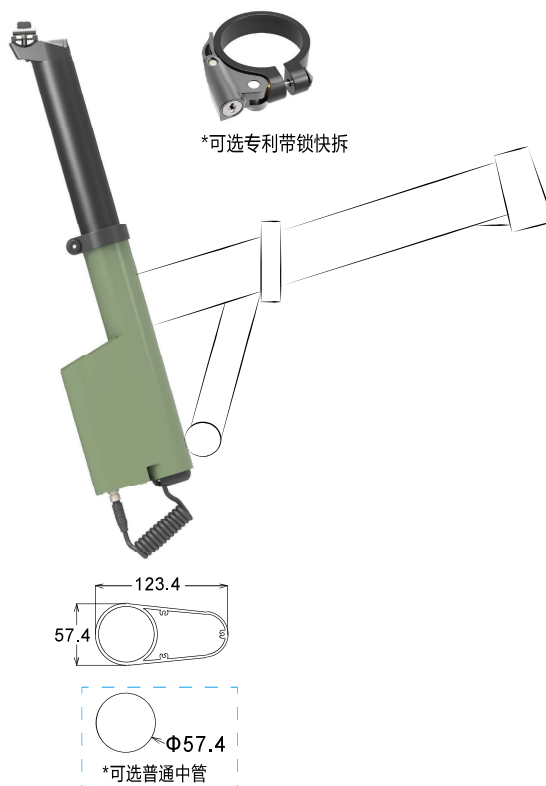


Model:SS-21700

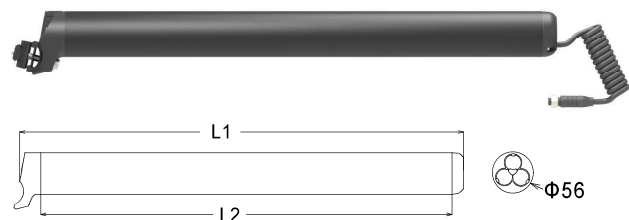


Model	SS-21700
Maximum cells	20 (21700)
Max capacity	36V10Ah
Charging port	DC2.1 Opt. 3Pin high current
Discharge port	2Pin
LED indicator	without
USB port	without
Power switch	without
L1·L2 (mm)	630x555

*Optional patent seat clamp

Seat tube

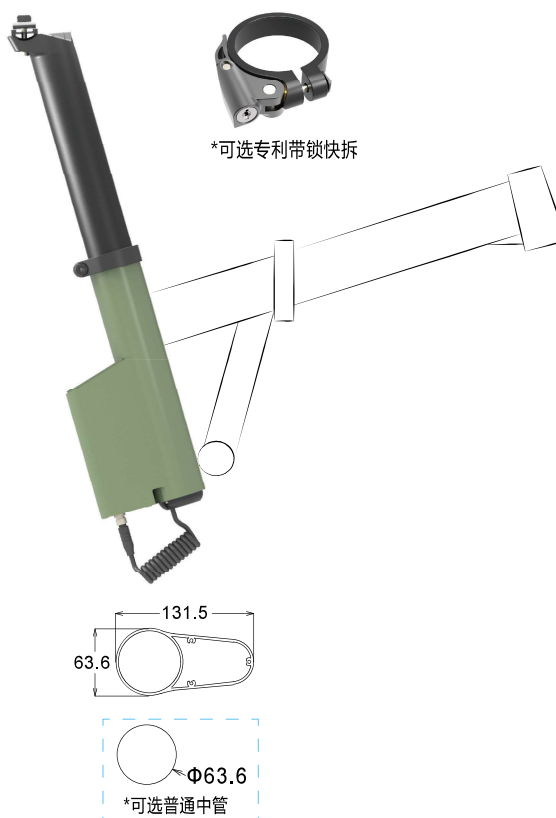



Model:IE-MINI

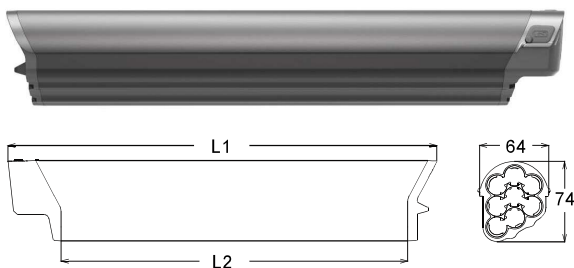


Model	IE-MINI	
Maximum cells	40 (18650)	30 (18650)
Max capacity	36V14Ah	36V10.5Ah
Charging port	DC2.1 Opt. 3Pin high current	
Discharge port	2Pin Opt. 6Pin	
LED indicator	single LED with three colours	
USB port	without	
Power switch	without	
L1·L2(mm)	430x354	365x289

*单层管匹配塑料覆盖件PLA0335

Down tube






Model:IE-PRO

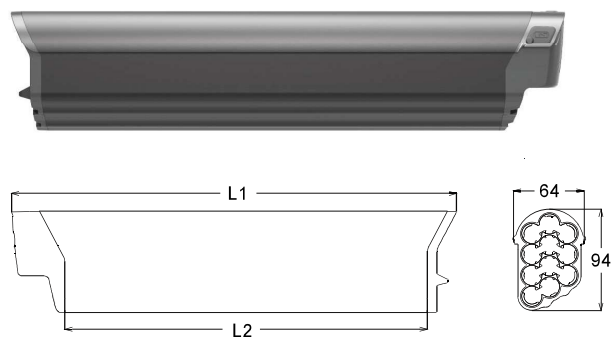


Model	IE-PRO	
Maximum cells	52 (18650)	40 (18650)
Max capacity	36V17.5Ah 48V14Ah	36V14Ah
Charging port	DC2.1 Opt. 3Pin high current	
Discharge port	2Pin Opt. 6Pin	
LED indicator	single LED with three colours	
USB port	without	
Power switch	without	
L1·L2(mm)	430x354	365x289

*单层管匹配塑料覆盖件PLA0335

Down tube

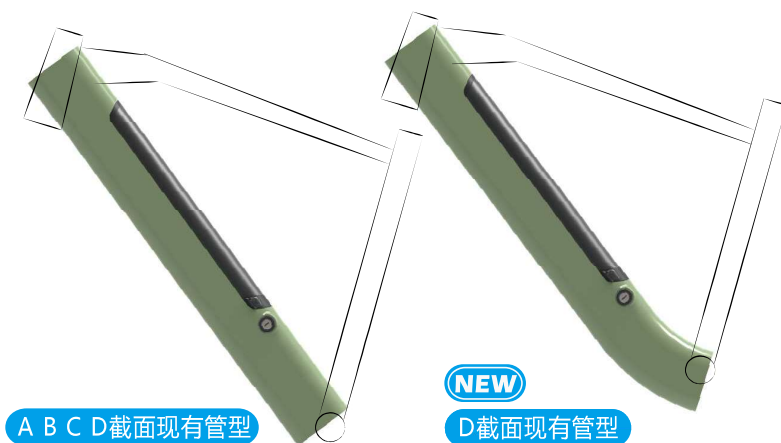


Model:ID- 21700

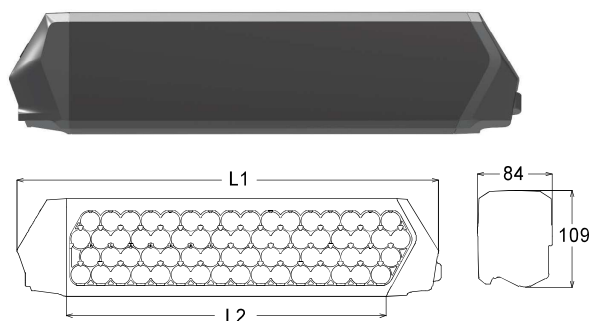


Model	ID-21700	
Maximum cells	65 (21700)	52 (21700)
Max capacity	36V30Ah 48V25Ah	36V25Ah 48V20Ah
Charging port	DC2.1 Opt. 3Pin high current	
Discharge port	2Pin Opt. 5Pin	
LED indicator	4 LED lights	
USB port	with	
Power switch	without	
L1·L2 (mm)	458x343.6	393x278.6

Down tube

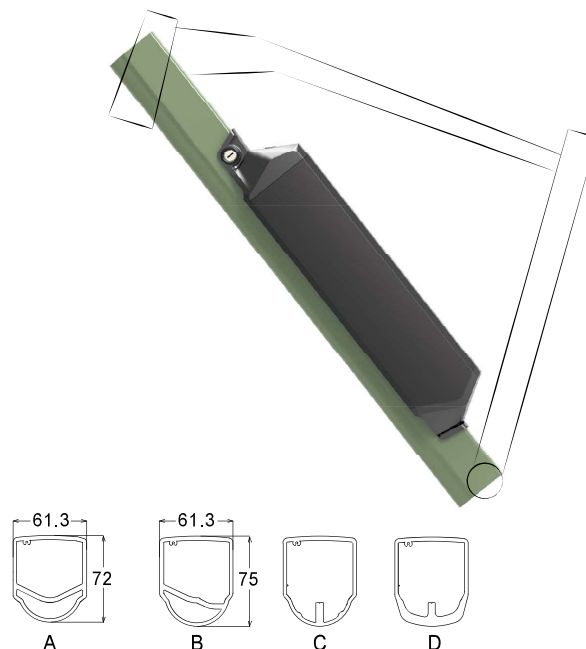


Model:ID-MAX

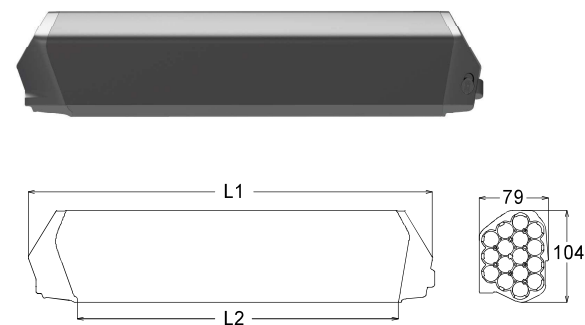


Model	ID-MAX	
Maximum cells	80 (18650)	60 (18650)
Max capacity	36V28Ah 48V21Ah	36V21Ah
Charging port	DC2.1 Opt. 3Pin high current	
Discharge port	2Pin Opt. 5Pin	
LED indicator	4 LED lights	
USB port	with	
Power switch	without	
L1·L2 (mm)	457x363	392x298

Down tube

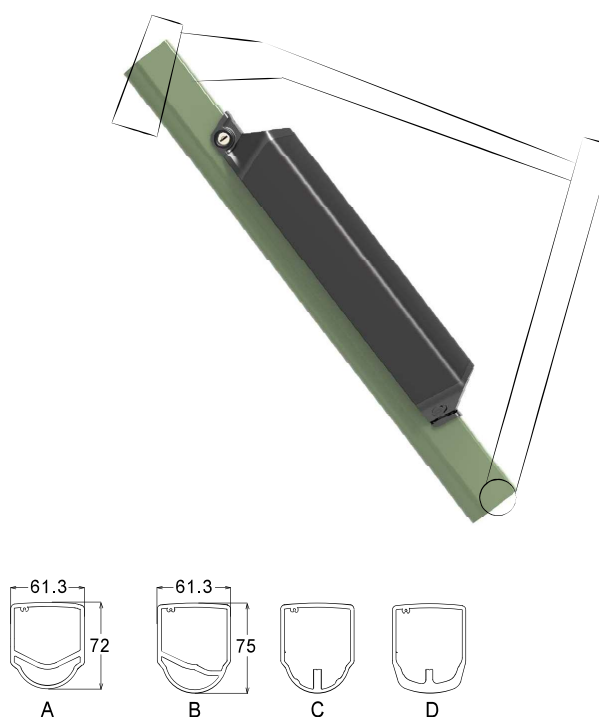


Model:ID-MINI

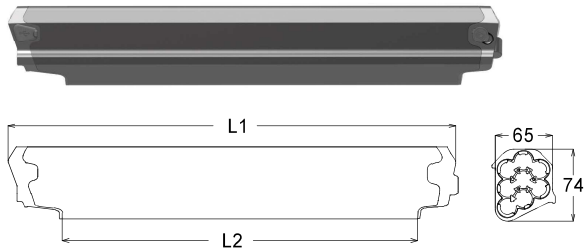


Model	ID-MINI	
Maximum cells	40 (18650)	30 (18650)
Max capacity	36V14Ah	36V10.5Ah
Charging port	DC2.1 Opt. 3Pin high current	
Discharge port	2Pin Opt. 5Pin	
LED indicator	single LED with three colours	
USB port	with	
Power switch	without	
L1·L2 (mm)	458x363	393x298

Down tube




Model:ID-PRO

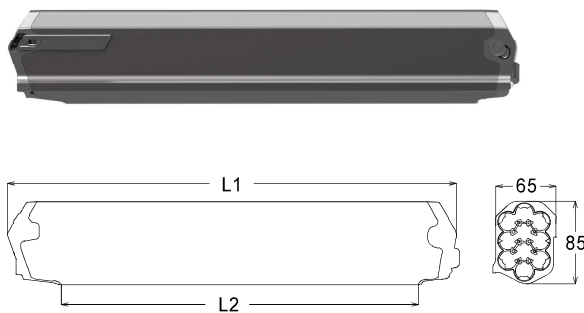


Model	ID-PRO	
Maximum cells	50 (18650)	40 (18650)
Max capacity	36V17.5Ah	36V14Ah
Charging port	DC2.1 Opt. 3Pin high current	
Discharge port	2Pin Opt. 5Pin	
LED indicator	single LED with three colours	
USB port	with	
Power switch	without	
L1·L2 (mm)	458x363	393x298

Down tube

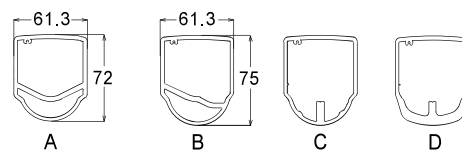


Model:ID-PLUS

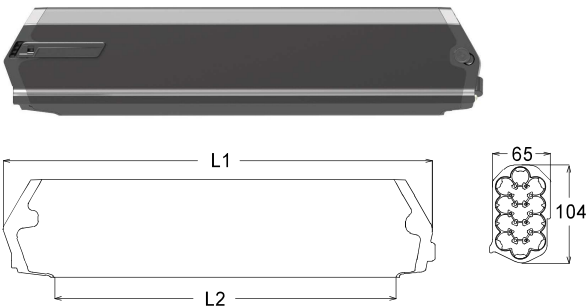


Model	ID-PLUS	
Maximum cells	65 (18650)	52 (18650)
Max capacity	36V21Ah 48V17.5Ah	36V17.5Ah 48V14Ah
Charging port	DC2.1 Opt. 3Pin high current	
Discharge port	2Pin Opt. 5Pin	
LED indicator	4 LED lights	
USB port	with	
Power switch	without	
L1·L2 (mm)	456.5x363	391.5x298


Down tube

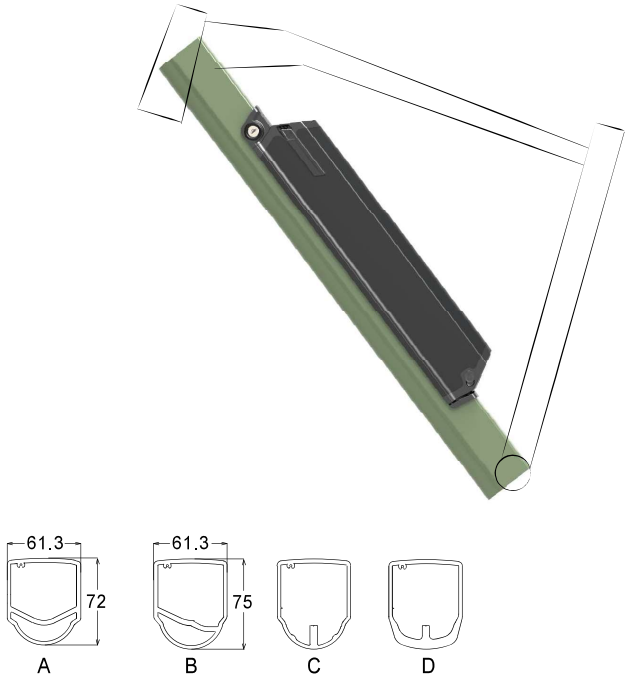

Model:FC-4

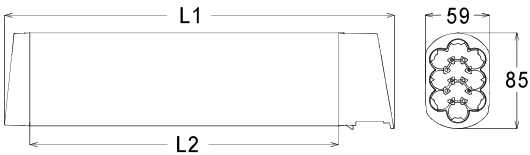


Model:FC-4-S 直款





Model	FC-4	FC-4-S
Maximum cells	40 (18650)	
Max capacity	36V14Ah	
Charging port	DC2.1 Opt. 3Pin high current	
Discharge port	6Pin	
LED indicator	4 LED lights	
USB port	without	
Power switch	without	
L1·L2(mm)	356x282.4	350x282.4

Down tube

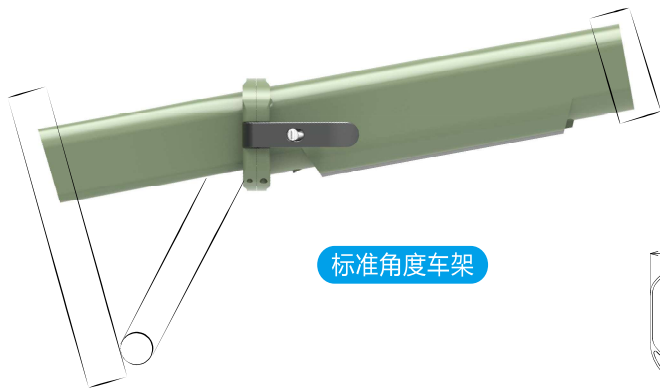


标准角度车架

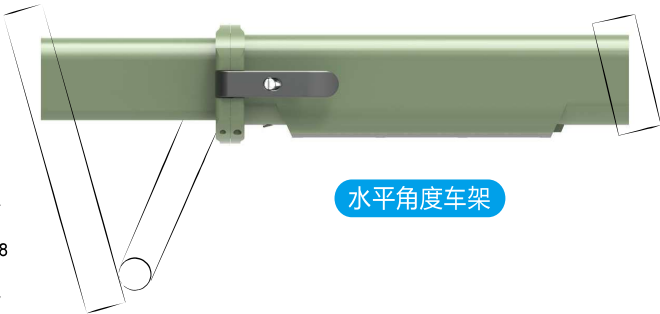


水平角度车架

Model:FC-5

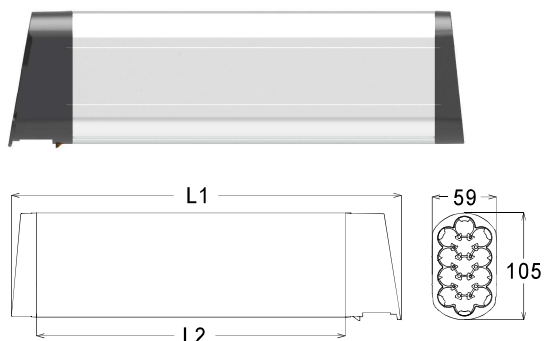


Model	FC-5
Maximum cells	52 (18650)
Max capacity	36V17.5Ah / 48V14Ah
Charging port	DC2.1 Opt. 3Pin high current
Discharge port	6Pin
LED indicator	4 LED lights
USB port	without
Power switch	without
L1·L2(mm)	356x282.4

Down tube

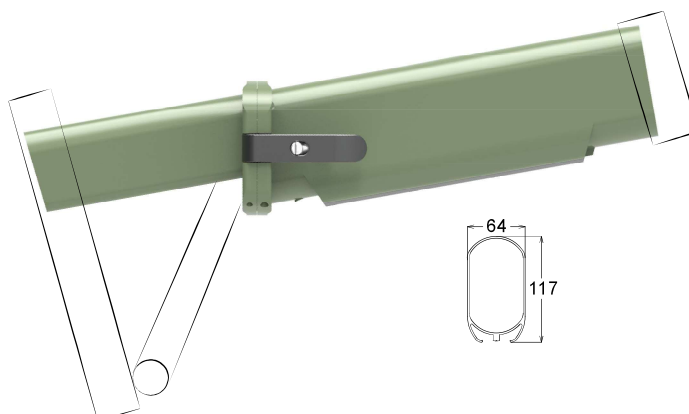


半月 SCIMITAR

Model:FS-3

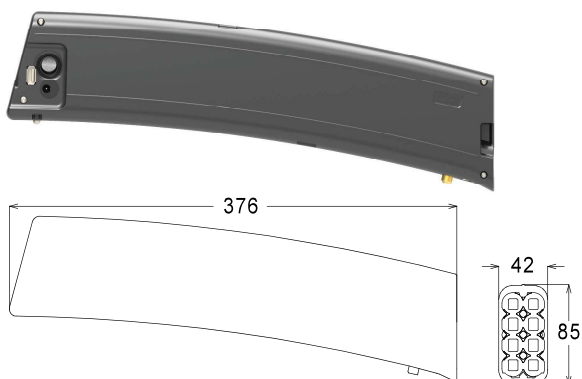


Model	FS-3
Maximum cells	30 (18650)
Max capacity	36V10.5Ah
Charging port	DC2.1 Opt. 3Pin high current
Discharge port	2Pin
LED indicator	without
USB port	with
Power switch	with
Optional parts	USB hole cover PLA0180

Down tube

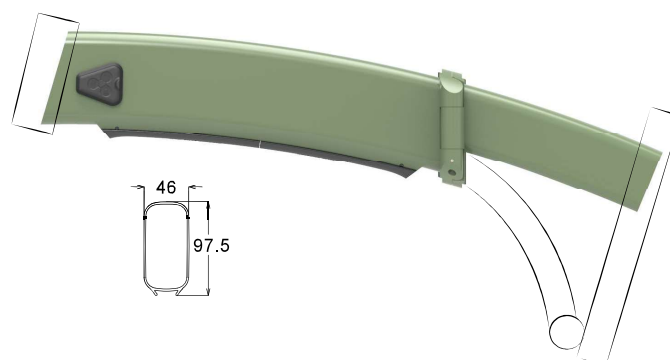


Model:FE-3

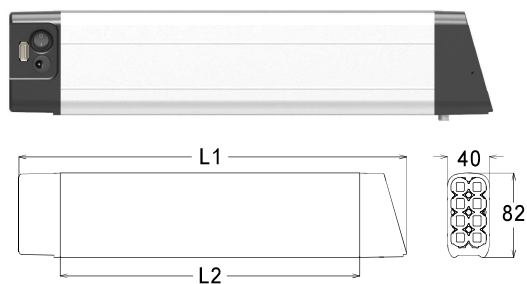


Model	FE-3
Maximum cells	30 (18650)
Max capacity	36V10.5Ah
Charging port	DC2.1 Opt. 3Pin high current
Discharge port	2Pin
LED indicator	without
USB port	with
Power switch	with
L1·L2 (mm)	376x290
Optional parts	USB hole cover PLA0180

Down tube

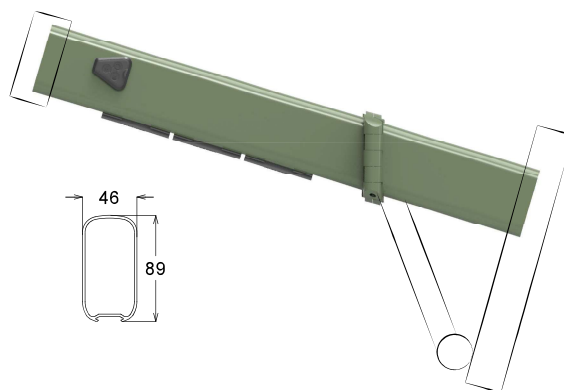


利剑 RAPIER

Model:FR-4

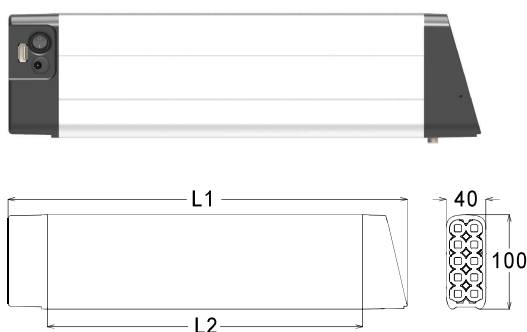


Model	FR-4
Maximum cells	40 (18650)
Max capacity	36V14Ah
Charging port	DC2.1 Opt. 3Pin high current
Discharge port	6Pin
LED indicator	without
USB port	with
Power switch	with
L1·L2 (mm)	376x290
Optional parts	USB hole cover PLA0180

Down tube

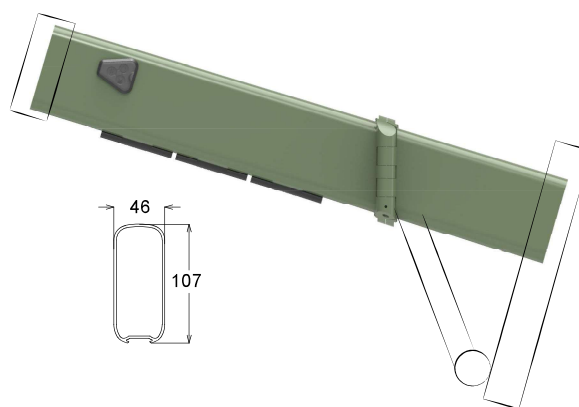

Model:DK-5

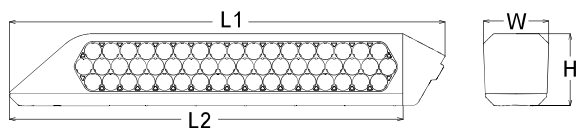


Model	DK-5-T	DK-5-B
Maximum cells	52 (18650)	
Max capacity	36V17.5Ah 48V14Ah	
Charging port	DC2.1 Opt. 3Pin high current	
Discharge port	6Pin	
LED indicator	4 LED lights	
USB port	without	
Power switch	without	
matched DT	with	without
normal base	without	with
L·W·H (mm)	526x79x72	526x79x87
Optional parts	Aluminum alloy controller box ALU0126	


Model:DK-5-B B表示配塑料导板底座



Model:DK-5-T T表示配车架下管，没有塑料导板

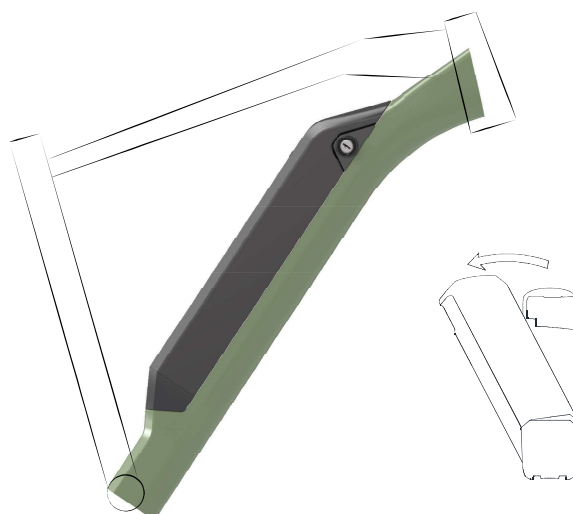


Model:DK-7

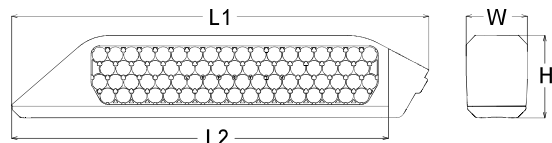


Model	DK-7-T	DK-7-B
Maximum cells	70 (18650) & 42 (21700)	
Max capacity	36V24.5Ah 48V17.5Ah	36V20Ah 48V15Ah
Charging port	DC2.1 Opt. 3Pin high current	
Discharge port	6Pin	
LED indicator	4 LED lights	
USB port	without	
Power switch	without	
matched DT	with	without
normal base	without	with
L·W·H (mm)	526x79x90	526x79x104
Optional parts	Aluminum alloy controller box ALU0126	

Model:DK-7-B B表示配塑料导板底座



Model:DK-7-T T表示配车架下管，没有塑料导板

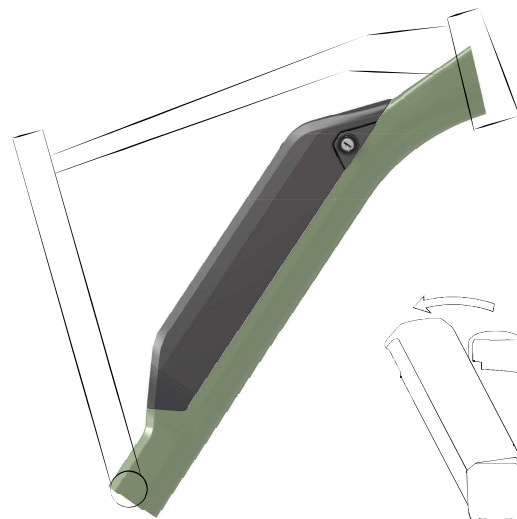




Model:DP-5/5C



Model:DP-6/6C



Model:DP-9/9C

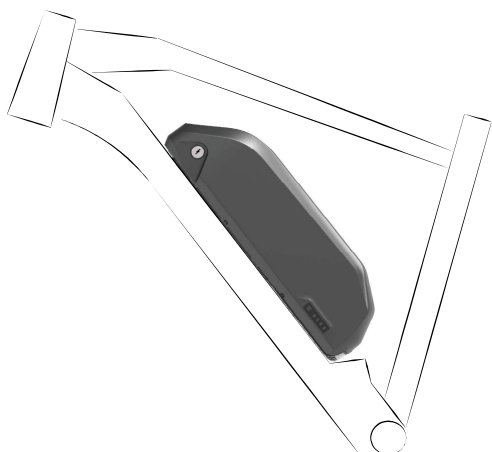

带控制器底部视图，型号中带C



不带控制器底部视图



Model	DP-5C	DP-5	DP-6C	DP-6	DP-9C	DP-9
Maximum cells	52 (18650)	56 (18650)	65 (18650)	70 (18650)	84 (18650)	91 (18650)
Max capacity	36V17.5Ah 48V14Ah	36V17.5Ah 48V14Ah 52V14Ah	36V21Ah 48V17.5Ah	36V24.5Ah 48V17.5Ah 52V17.5Ah	36V28Ah 48V21Ah 52V21Ah	36V31.5Ah 48V24.5Ah
Charging port	DC2.1 Opt. 3Pin high current					
Discharge port	4Pin	5Pin	4Pin	5Pin	4Pin	5Pin
LED indicator	4 LED lights					
USB port	without					
Power switch	with					
Controller box*	with	without	with	without	with	without
L·W·H (mm)	368x90x96		368x90x113		368x90x141	
Optional parts	base block PLA0288		switch hole cover PLA0187		spring lock SDP0017	

*Can fit 9 mosfets controller PCB

Model:DP-2170-4C



Model:DP-2170-5C

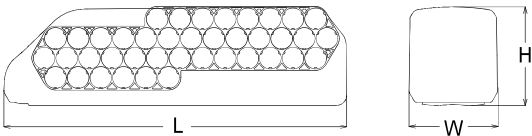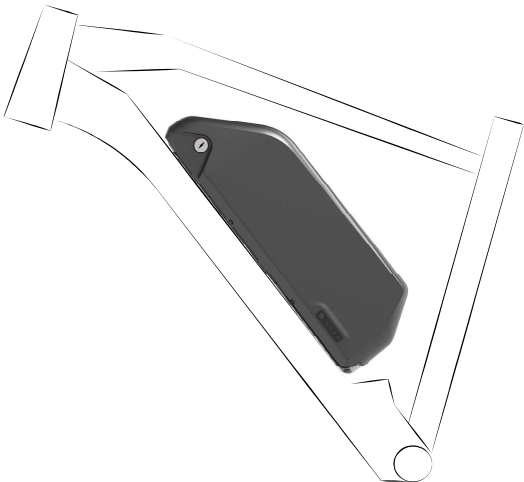

Model	DP-2170-4C	DP-2170-5C
Maximum cells	40 (21700)	52 (21700)
	52 (18650)	65 (18650)
Max capacity	36V20Ah	36V25Ah 48V20Ah
Charging port	DC2.1 Opt. 3Pin high current	
Discharge port	4Pin	
LED indicator	4 LED lights	
USB port	without	
Power switch	with	
Controller box*	with	with
L·W·H (mm)	368x95x106	368x95x125
Optional parts	base block PLA0288 switch hole cover PLA0187 spring lock SDP0017	

*Can fit 9 mosfets controller PCB

Model:DS-4



Model:DS-4C



Model:DS-5





Model:DS-5C



Model:DS-6




Model:DS-6C

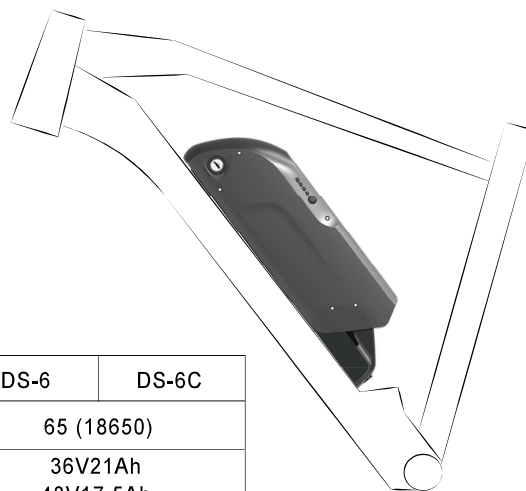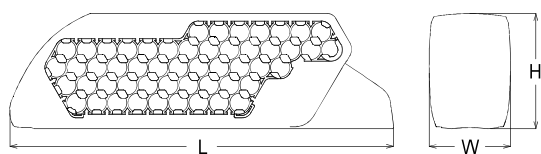

Model	DS-4	DS-4C	DS-5	DS-5C	DS-6	DS-6C
Maximum cells	40 (18650)		52 (18650)		65 (18650)	
Max capacity	36V14Ah		36V17.5Ah 48V14Ah		36V21Ah 48V17.5Ah	
Charging port	DC2.1 Opt. 3Pin high current					
Discharge port	2Pin Opt. 5Pin					
LED indicator	4 LED lights					
USB port	with					
Power switch	with					
Controller box*	without	with	without	with	without	with
L·W·H (mm)	343x78x99	378x78x99	343x78x114	378x78x114	343x78x132	378x78x132
Optional parts	base block PLA0288			switch hole cover PLA0187		

*Can fit 9 mosfets controller PCB

Model:DC-1C

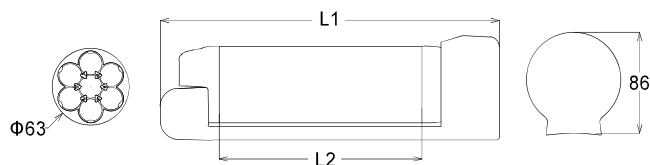

Model:DC-2C




Model	DC-1C	DC-2C
Maximum cells	14 (18650)	21 (18650)
Max capacity	24V7Ah	24V10.5Ah 36V7Ah
Charging port	DC2.1 Opt. 3Pin high current	
Discharge port	2Pin	
LED indicator	single LED with three colours	
USB port	with	
Power switch	without	
Controller box*	with	
L1·L2 (mm)	257x144	326x214
Optional parts	spring lock SDP0028 base block PLA0288	

*Can fit 6 mosfets controller PCB

海兔 21700 CUTTLE

NEW

Model:DC-2170-1C

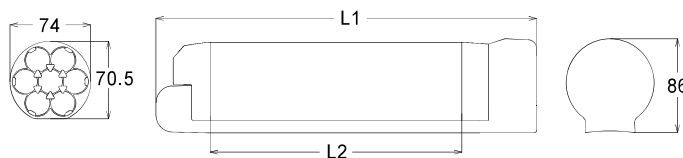



Model:DC-2170-2C



Model	DC-21700	
Maximum cells	14 (21700)	21 (21700)
Max capacity	24V10Ah	24V15Ah 36V10Ah
Charging port	DC2.1 Opt. 3Pin high current	
Discharge port	6Pin	
LED indicator	single LED with three colours	
USB port	with	
Power switch	without	
Controller box*	with	
L1·L2 (mm)	277x160	347x230
Optional parts	spring lock SDP0028 base block PLA0288	

*Can fit 6 mosfets controller PCB

Model:DA-5C

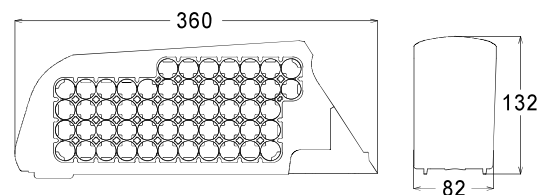
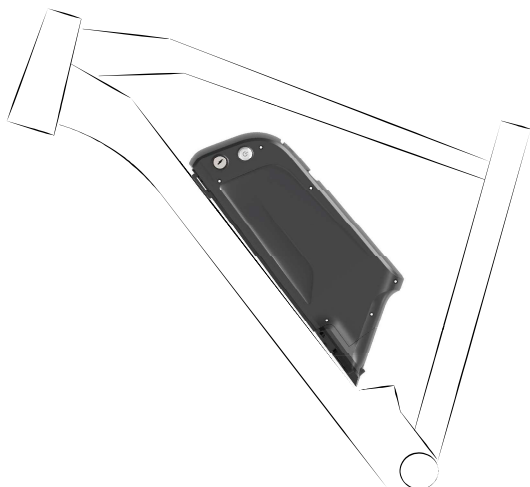


Model	DA-5C
Maximum cells	52 (18650)
Max capacity	36V17.5Ah / 48V14Ah
Charging port	DC2.1 Opt. 3Pin high current
Discharge port	2Pin Opt. 5Pin
LED indicator	4 LED lights
USB port	with
Power switch	with
Controller box*	with

*Can fit 6 mosfets controller PCB

雷霆 THUNDER


Model:DT-4C

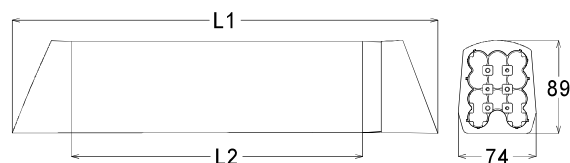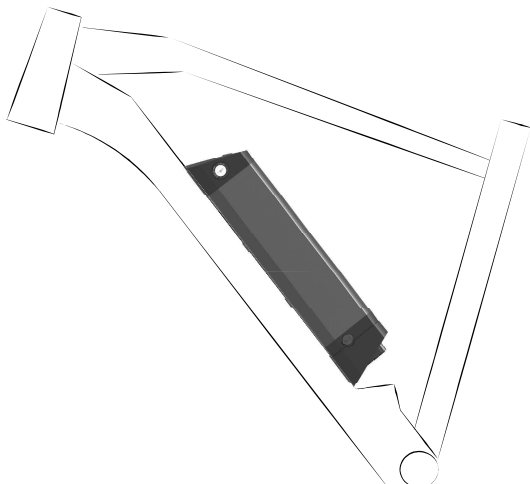

Model	ST-4C
Maximum cells	40 (18650)
Max capacity	36V14Ah
Charging port	DC2.1 Opt. 3Pin high current
Discharge port	2Pin
LED indicator	4 LED lights
USB port	without
Power switch	without
Controller box*	with
L1·L2 (mm)	407x278

*Can fit 6 mosfets controller PCB

Model:SF-2

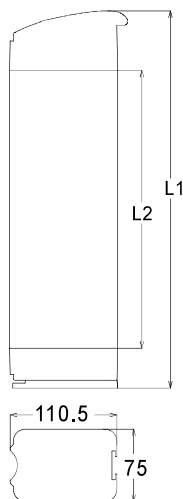


Model	SF-2
Maximum cells	70 (18650)
Max capacity	36V24.5Ah 48V17.5Ah
Charging port	3Pin XLR Opt. DC2.1
Discharge port	2Pin Opt. 4Pin
LED indicator	3 LED lights
USB port	without
Power switch	with
Controller box*	without
L1·L2 (mm)	386.5x285

小银鱼 BRILLIANCE

NEW

Model:SF-3

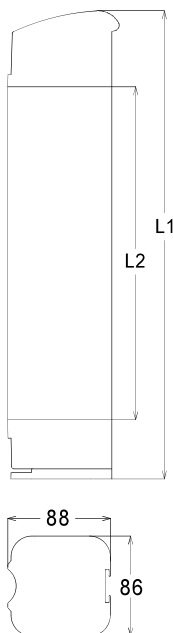

Model	SF-3
Maximum cells	40 (18650)
Max capacity	36V14Ah
Charging port	3Pin XLR Opt. DC2.1
Discharge port	2Pin Opt. 4Pin
LED indicator	3 LED lights
USB port	without
Power switch	with
Controller box*	without
L1·L2 (mm)	400x285

Model:RB-1



Model:RB-1





Model:RB-2



Model:RB-3

Model:RB-1-PLUS

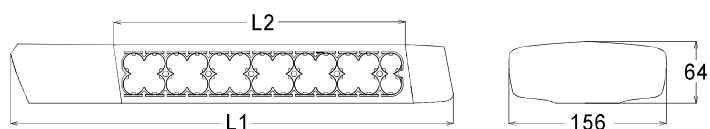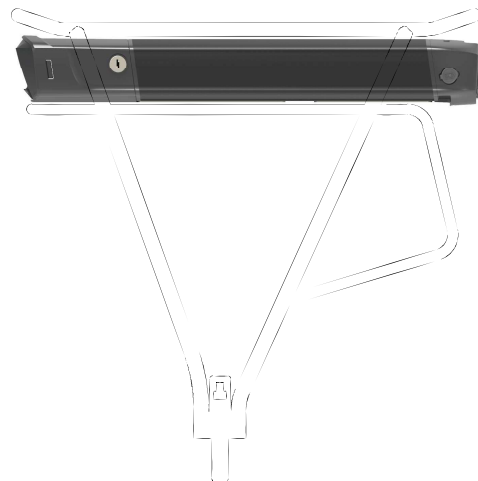

Model	RB-1	RB-2	RB-3	RB-1-PLUS
Maximum cells	52 (18650)			60 (18650)
Max capacity	36V17.5Ah 48V14Ah			36V21Ah 48V14Ah
Charging port	DC2.1 Opt. 3Pin high current			
Discharge port	6Pin			
LED indicator	4 LED lights	without	3LED lights	4 LED lights
USB port	without			
Power switch	with			
Controller space	with			without
Rear light	with	without	with	
L1·L2(mm)	446x278	438x278	438x278	425x320

Model:RK-3




Model:RK-3C




Model:RK-4




Model:RK-4C




Model	RK-3	RK-3C	RK-4	RK-4C
Maximum cells	30 (18650)		40 (18650)	
Max capacity	24V14Ah 36V10.5Ah		36V14Ah	
Charging port	DC2.1 Opt. 3Pin high current			
Discharge port	5Pin			
LED indicator	4 LED lights			
USB port	without			
Power switch	with			
Controller space	without	with	without	with
L·W·H (mm)	282x148x56	340x148x74	349x148x56	407x148x74
Optional parts	spring lock SDP0015			

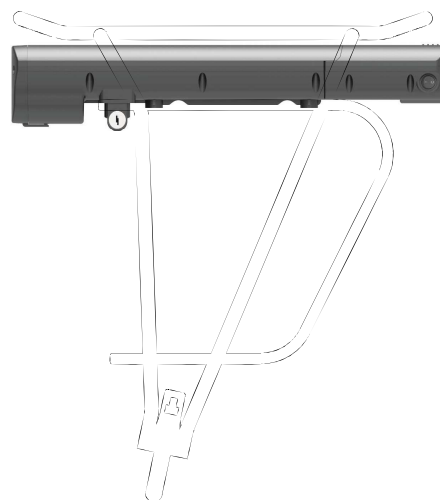

Model:RS-3




Model	RS-3
Maximum cells	30 (18650)
Max capacity	36V10.5Ah
Charging port	DC2.1 Opt. 3Pin high current
Discharge port	2pin Opt. 6Pin
LED indicator	4 LED lights
USB port	with
Power switch	without
Controller space	without
Rear light	with
L1·L2(mm)	436x324

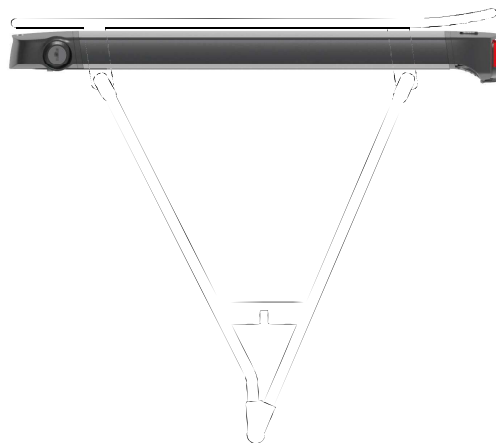


飞鱼 VULPECULA

Model:RV-5C

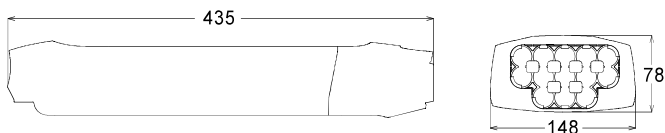

Model	RV-5C
Maximum cells	52 (18650)
Max capacity	36V17.5Ah 48V14Ah
Charging port	DC2.1 Opt. 3Pin high current
Discharge port	2pin Opt. 6Pin
LED indicator	4 LED lights
USB port	with
Power switch	without
Controller space	with
Rear light	with

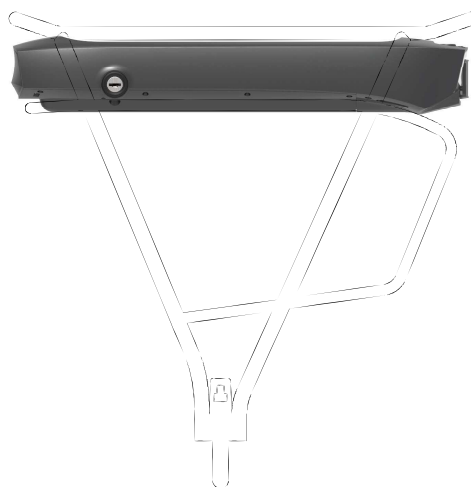



Kunshan Reention Electrical and Mechanical Co.,Ltd 昆山睿恩新机电有限公司

江苏省昆山市高新区燕桥浜路350号

Address:NO.350,Yanqiaobangroad,KunshanHi-techdevelopmentzone , Kunshan,Jiangsu,215333,China.

Tel:+86-512-55181401

Fax:+86-512-55181402

E-mail:reention@163.com

www.reention.com